

PRO3010 - Solid Core CT

The PRO CT series offers a range of solid core current transformers. The Inepro solid core current transformers are perfectly suitable for installation in combination with a PRO380 CT smart energy meter. To measure a.c. primary currents and produce a proportional secondary current signal.

PRO2010

- Primary current: 5 to 100A
- 22mm cable aperture
- Supplied with busbar mounting bracket


PRO3010

- Primary current: 5 to 300A
- 23mm cable aperture
- Supplied with busbar mounting bracket

All our Current Transformers come with a **5 year** warranty.



Dimensions:

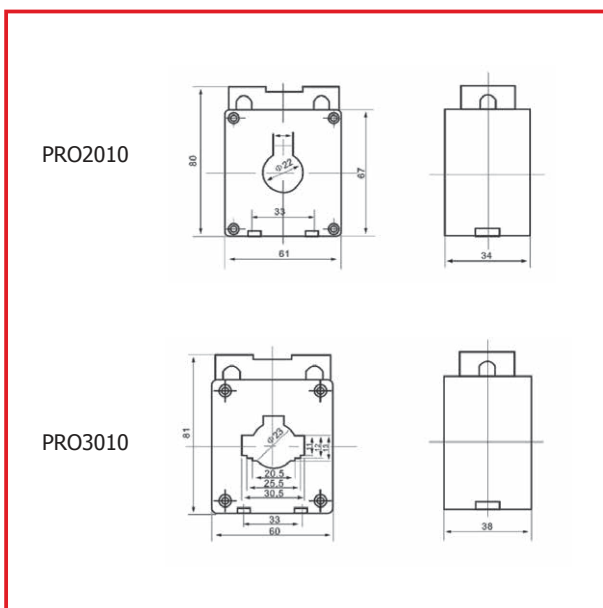

Current Transformer Ratios:

PRO2010

Article No	Ratio	Class	Burden
PRO2010-CT5-5	5/5	0.5	1VA
PRO2010-CT5-30	30/5	0.5	1VA
PRO2010-CT5-50	50/5	0.5	2.5VA
PRO2010-CT5-75	75/5	0.5	2.5VA
PRO2010-CT5-100	100/5	0.5	2.5VA

PRO3010

Article No	Ratio	Class	Burden
PRO3010-CT5-5	5/5	0.5	1VA
PRO3010-CT5-30	30/5	0.5	1VA
7111 PRO3010-CT5-50	50/5	1	2.5VA
7108 PRO3010-CT5-100	100/5	0.5	2.5VA
7101 PRO3010-CT5-150	150/5	0.5	5VA
7102 PRO3010-CT5-200	200/5	0.5	5VA
7103 PRO3010-CT5-250	250/5	0.5	5VA
7110 PRO3010-CT5-300	300/5	0.5	5VA

blue = in stock

Inepro of Holland

PRO5010 - Solid Core CT

The PRO CT series offers a range of solid core current transformers. The Inepro solid core current transformers are perfectly suitable for installation in combination with a PRO380 CT smart energy meter. To measure a.c. primary currents and produce a proportional secondary current signal.


PRO4010

- Primary current: 200 to 600A
- 36mm cable aperture
- Supplied with busbar mounting bracket


PRO5010

- Primary current: 400 to 600A
- 37mm cable aperture
- Supplied with busbar mounting bracket

All our Current Transformers come with a **5 year** warranty.

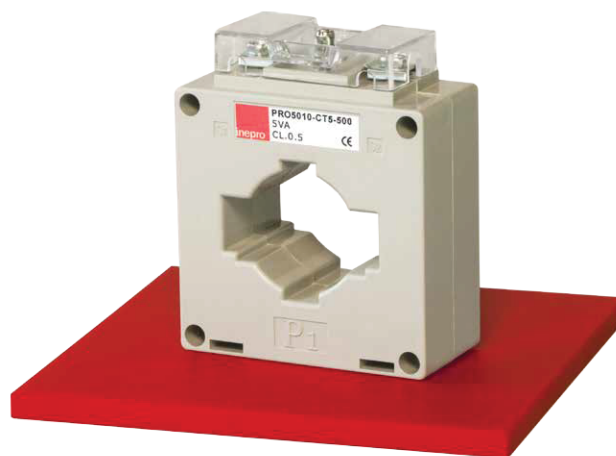

Dimensions:

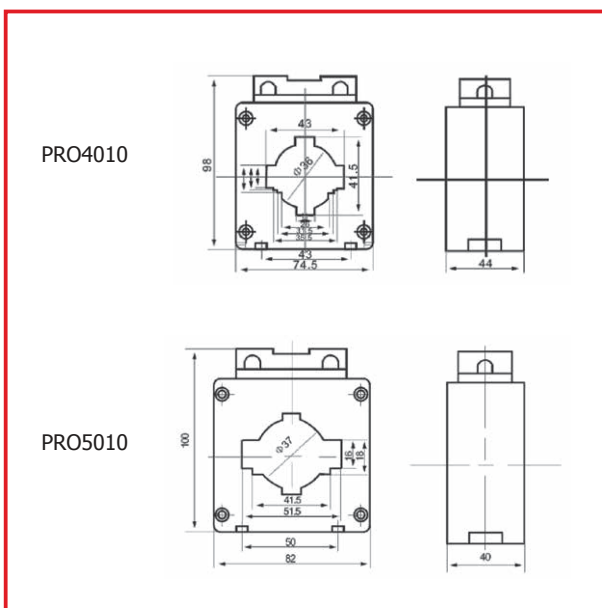

Current Transformer Ratios:

PRO4010

Article No	Ratio	Class	Burden
PRO4010-CT5-200	200/5	0.5	5VA
PRO4010-CT5-300	300/5	0.5	5VA
PRO4010-CT5-400	400/5	0.5	5VA
PRO4010-CT5-600	600/5	0.5	5VA

PRO5010

Article No	Ratio	Class	Burden
7112 PRO5010-CT5-400	400/5	0.5	5VA
7113 PRO5010-CT5-500	500/5	0.5	5VA
7114 PRO5010-CT5-600	600/5	0.5	5VA

blue = in stock

Inepro of Holland

PRO8010 - Solid Core CT

The PRO CT series offers a range of solid core current transformers. The Inepro solid core current transformers are perfectly suitable for installation in combination with a PRO380 CT smart energy meter. To measure a.c. primary currents and produce a proportional secondary current signal.


PRO6010

- Primary current: 400 to 800A
- 46mm cable aperture
- Supplied with busbar mounting bracket


PRO8010

- Primary current: 600 to 1500A
- 50mm cable aperture
- Supplied with busbar mounting bracket

All our Current Transformers come with a **5 year** warranty.

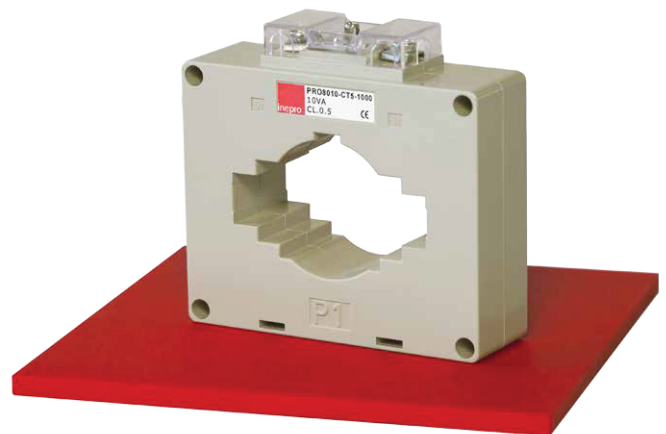

Dimensions:

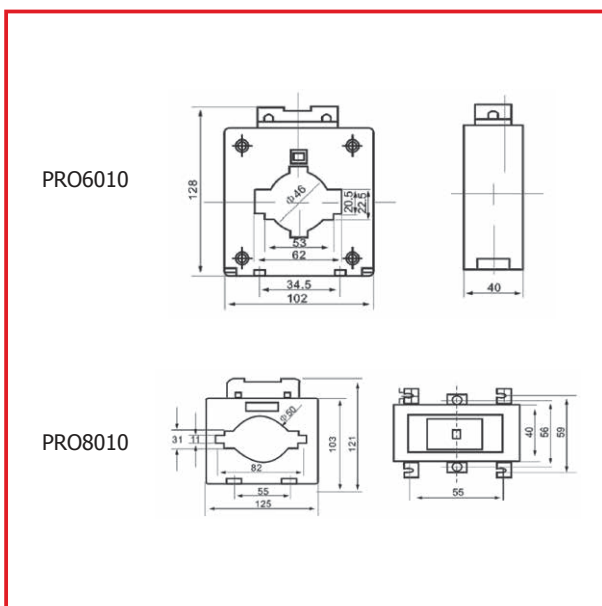

Current Transformer Ratios:

PRO6010

Article No	Ratio	Class	Burden
PRO6010-CT5-400	400/5	0.5	5VA
PRO6010-CT5-600	600/5	0.5	5VA
PRO6010-CT5-800	800/5	0.5	5VA

PRO8010

Article No	Ratio	Class	Burden
PRO8010-CT5-600	600/5	0.5	5VA
PRO8010-CT5-800	800/5	0.5	5VA
7115 PRO8010-CT5-1000	1000/5	0.5	10VA
PRO8010-CT5-1500	1500/5	0.5	10VA

blue = in stock

Inepro of Holland